



SOVEREIGN CHEMICAL COMPANY

1225 West Market St., Akron OH 44313

Phone: 330-869-0500, Fax: 330-869-0518

www.sovchem.net


Oxoflex® DPA Pastilles

Manufacturer: Sovereign Chemical Company

Classification: Diphenylamine antioxidant and antiflex agent

Chemical Composition:

Chemical Structure:

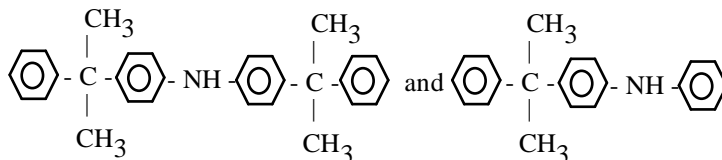

Chemical Name: 90% 4,4'-dicumyldiphenylamine and 10% 4-cumyldiphenylamine

Physical Data

Specification Property	Value	Test Method
Melting Point	85.0-95.0°C	SCC-108
Heat Loss	0.5% Maximum	SCC-109 at 70°C/3 hour
Acetone Insolubles	0.1% Maximum	SCC-110
Ash Content	0.1% Maximum	SCC-111
Typical Properties		
Specific gravity	1.14	Typical 20°C
Bulk density	550 kg/m ³	Typical
Physical Form	Light-violet to gray-violet pastilles	Visual

Applications

Protection: An alkylated diphenylamine that is a very effective antioxidant that provides long term protection. It also provides protection against flex cracking, metal ion degradation and heat aging. It is a weak antiozonant in neoprene rubber.

Polymers: All synthetic and natural rubbers. Especially good in polyisoprene, natural rubber, neoprene, and nitrile rubbers.

Synergism: Synergistic with phenolic antioxidants, phosphite antioxidants, p-phenylenediamines, MMBI and microcrystalline/paraffin waxes.

Staining: Non-staining and only very slightly dis-coloring in sunlight. Non-staining and non-discoloring upon heat aging.

Cure Effect: Non-activating on the cure.

Product Use: Especially suited for use in tires, belts, hoses, cables and mechanical rubber goods. Also as a stabilizer for plastics, lubricants and oils.

Recommended Dosage

As an Anti-flex Agent:

1.0-2.0 phr

As an Antioxidant:

1.0-2.5 phr in a carbon-black filled compound

0.5-1.5 phr in a non-black compound with phenolic antioxidant (1-1.5 phr)

1.0-3.5 phr in CR

For Heat Resistance:

1.-4.0 phr in combination with MMBI

As a Metal Antidegradant:

1.0-2.0 phr

As a Polymer Stabilizer:

In polyamides 0.10-1.00 % weight

In polyolefins 0.05-0.5 weight

In oils 0.10-1.0 % weight

FDA Regulations

Adhesive component, indirect food additive 21 CFR 175.105(C)(5)

Antioxidant and/or stabilizer for polymers 21 CFR 178.2010(b)

Food contact surface component 21 CFR 177.1590(b)

Resinous and polymeric coating 21 CFR 175.300(b)(3)

Packaging and Storage

Packaging: 25 kg (55.1 lb) 3-layer paper bags.

Shelf Life: 2 years if stored as indicated below.

Storage: Store in unopened original packaging in a cool dry place away from foodstuffs, oxidants and acids.

Specification Date: July 16, 2001 (Supersedes: November 30, 1999)